

# **Engineering Mechanics**

## **AGE 2330**

### **Lect 2: Force System**


Dr. Feras Fraige

# Force Systems




# Force Systems

---

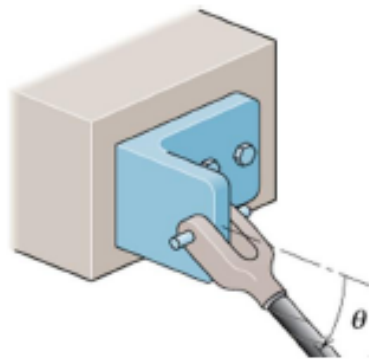

Cable Tension  $P$

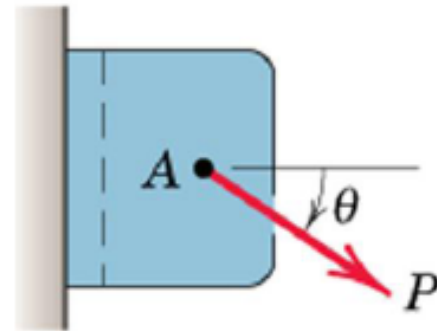

- **Force:** Represented by vector
  - Magnitude, direction, point of application
  - $P$ : fixed vector (or sliding vector??)
  - External Effect
    - Applied force; Forces exerted by bracket, bolts, Foundation (reactive force)

# Force Systems

---


- **Rigid Bodies**

- External effects only

- **Line of action** of force is **important**


- Not its **point of application**

- Force as **sliding vector**

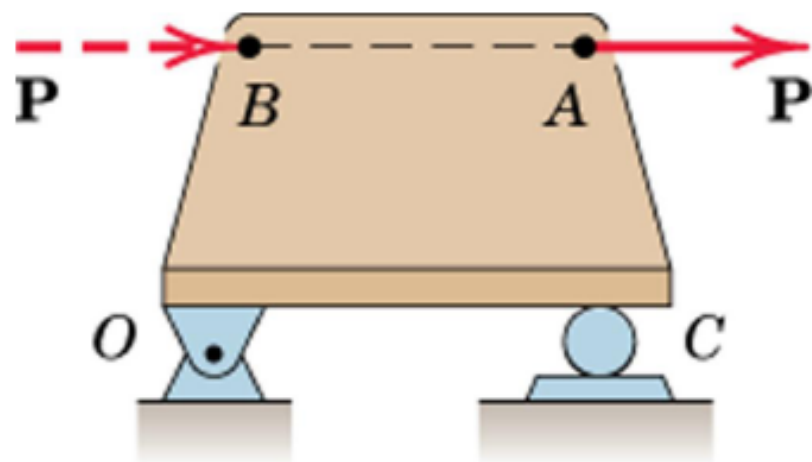


# Force Systems

- **Concurrent forces**
  - Lines of action intersect at a point

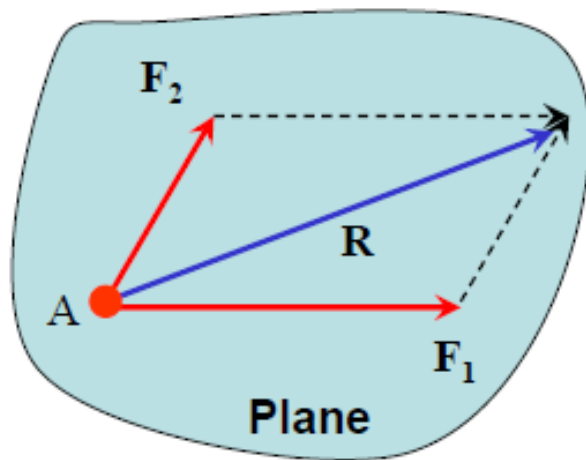


Concurrent Forces

$F_1$  and  $F_2$

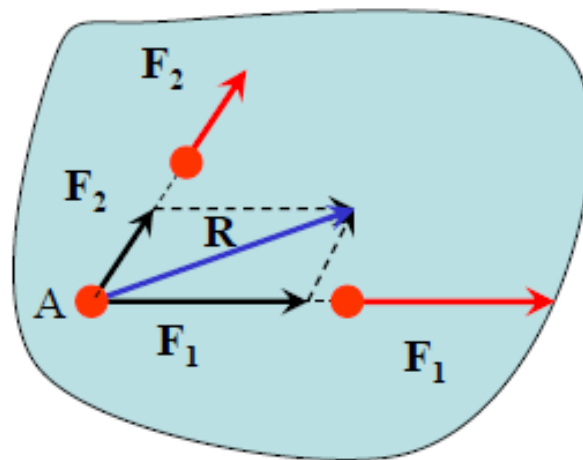


Principle of  
Transmissibility

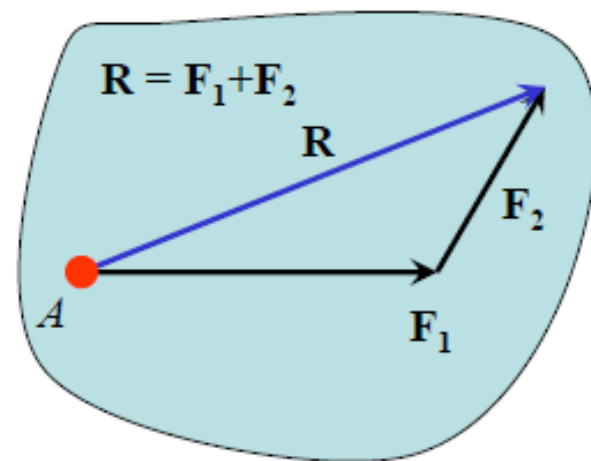


$$R = F_1 + F_2$$

# Components and Projections of a Force

- **Components and Projections**
  - **Equal** when axes are orthogonal

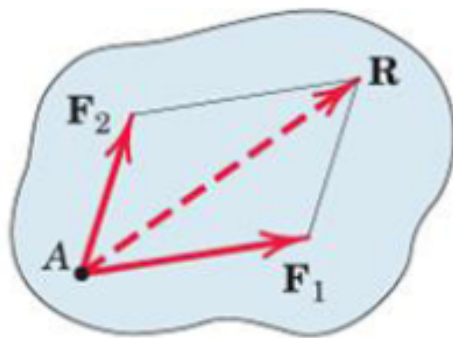

$F_1$  and  $F_2$  are components of  $R$   
 $R = F_1 + F_2$

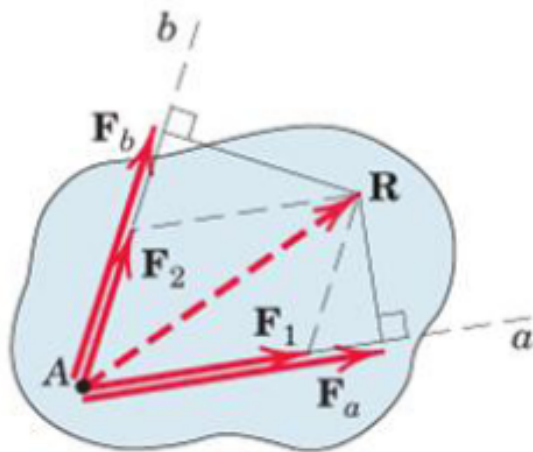


:  $F_a$  and  $F_b$  are perpendicular projections on axes  $a$  and  $b$

:  $R \neq F_a + F_b$  unless  $a$  and  $b$  are perpendicular to each other


# Components of a Force

---

- Examples

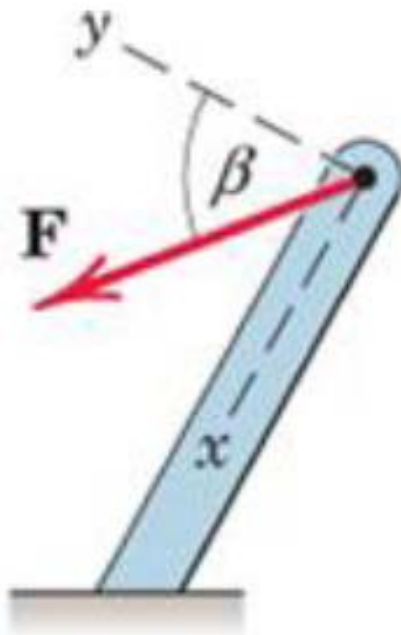


$$F_x = F \sin \beta$$
$$F_y = F \cos \beta$$

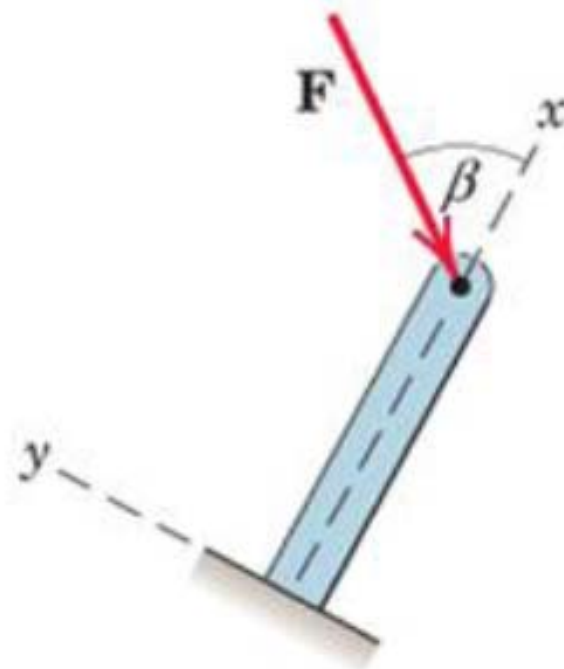


$$F_x = -F \cos \beta$$
$$F_y = -F \sin \beta$$

# Components of a Force

- Examples

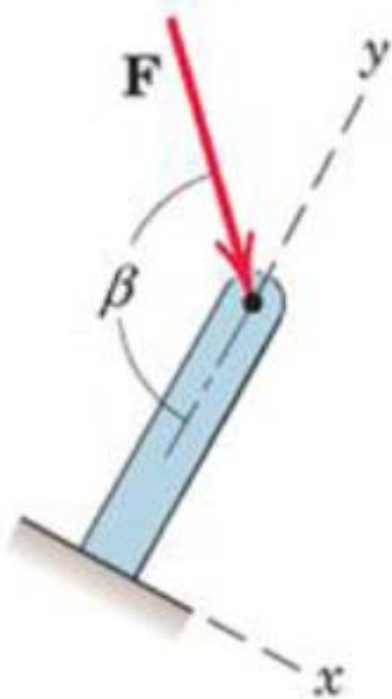

$$F_x = F \sin(\pi - \beta)$$
$$F_y = -F \cos(\pi - \beta)$$

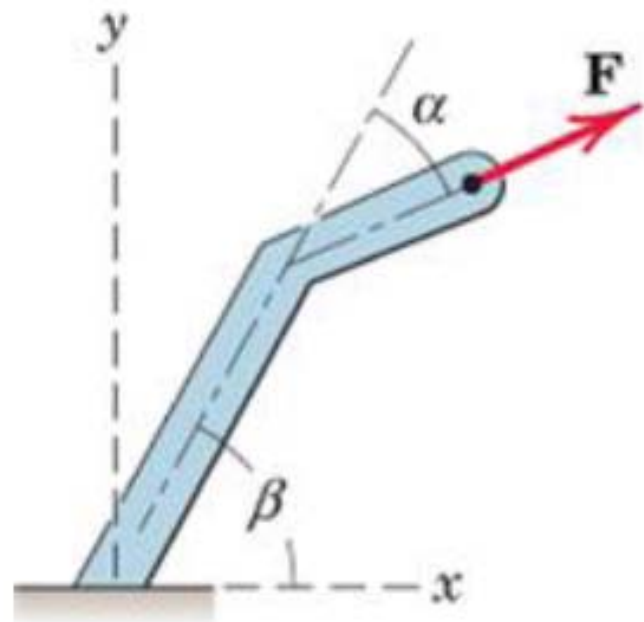


$$F_x = F \cos(\beta - \alpha)$$
$$F_y = F \sin(\beta - \alpha)$$



# Components of a Force





## Example 1:

Determine the x and y scalar components of  $F_1$ ,  $F_2$ , and  $F_3$  acting at point A of the bracket

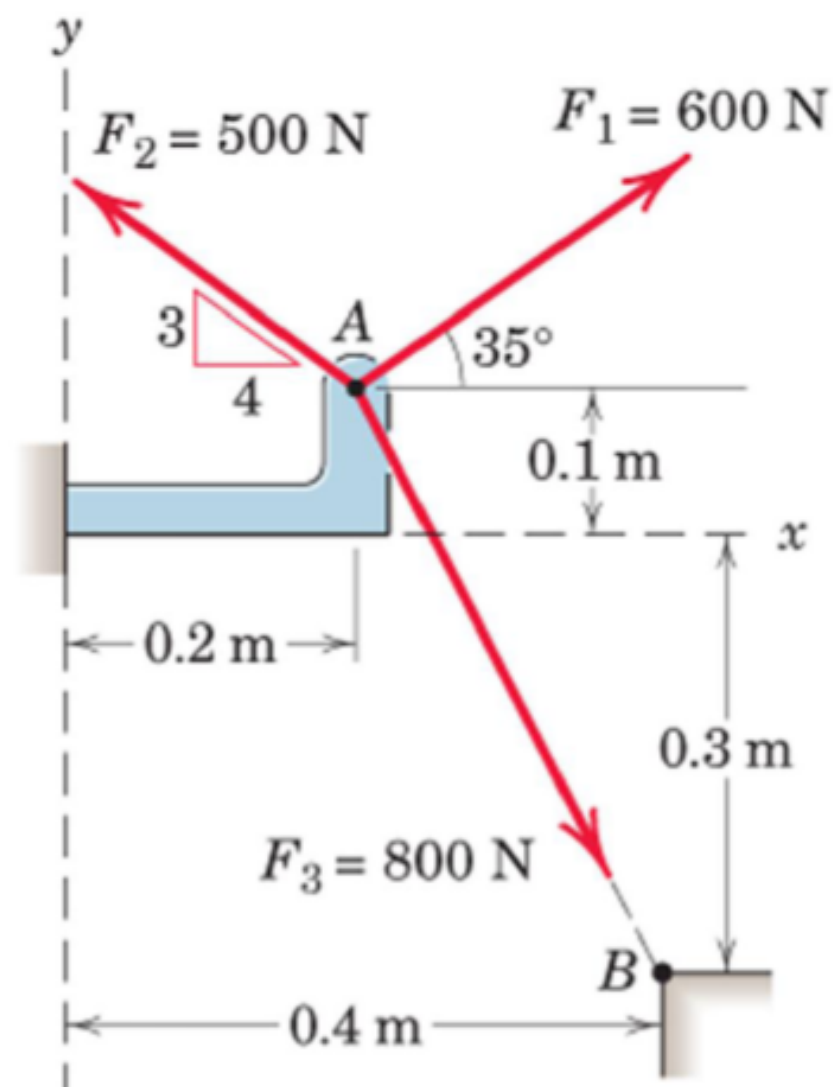

# Components of Force

Solution:

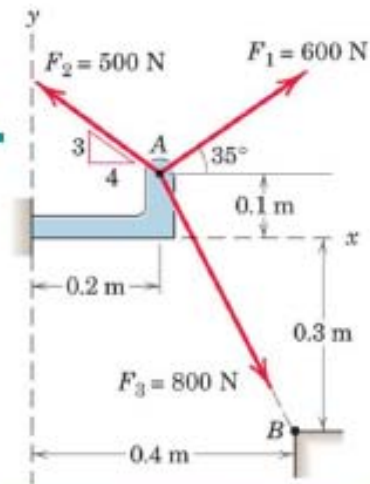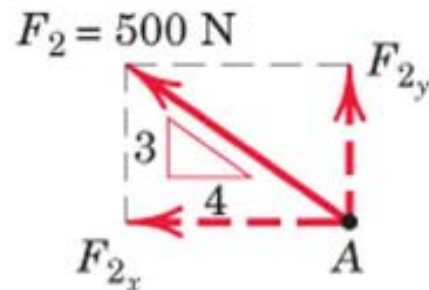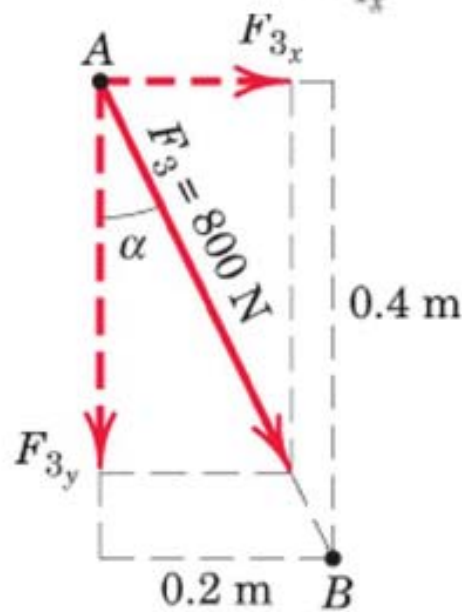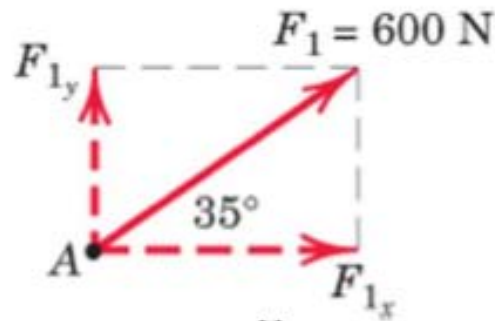

$$F_{1x} = 600 \cos 35^\circ = 491\text{ N}$$

$$F_{1y} = 600 \sin 35^\circ = 344\text{ N}$$

$$F_{2x} = -500\left(\frac{4}{5}\right) = -400\text{ N}$$

$$F_{2y} = 500\left(\frac{3}{5}\right) = 300\text{ N}$$

$$\alpha = \tan^{-1} \left[ \frac{0.2}{0.4} \right] = 26.6^\circ$$

$$F_{3x} = F_3 \sin \alpha = 800 \sin 26.6^\circ = 358\text{ N}$$

$$F_{3y} = -F_3 \cos \alpha = -800 \cos 26.6^\circ = -716\text{ N}$$

# Components of Force

---

Alternative Solution: Scalar components of  $\mathbf{F}_3$  can be obtained by writing  $\mathbf{F}_3$  as a magnitude times a unit vector  $\mathbf{n}_{AB}$  in the direction of the line segment AB.


Unit vector can be formed by dividing any vector, such as the geometric position vector by its length or magnitude.

$$\begin{aligned}\mathbf{F}_3 &= F_3 \mathbf{n}_{AB} = F_3 \frac{\overrightarrow{AB}}{AB} = 800 \left[ \frac{0.2\mathbf{i} - 0.4\mathbf{j}}{\sqrt{(0.2)^2 + (-0.4)^2}} \right] \\ &= 800[0.447\mathbf{i} - 0.894\mathbf{j}] \\ &= 358\mathbf{i} - 716\mathbf{j} \text{ N} \\ F_{3_x} &= 358 \text{ N} \\ F_{3_y} &= -716 \text{ N}\end{aligned}$$

# Components of Force


---

**Example 2:** The two forces act on a bolt at A. Determine their resultant.

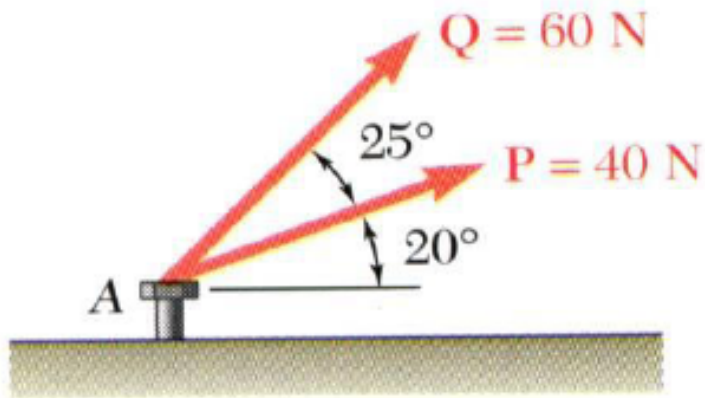


- **Graphical solution –**
- Construct a parallelogram with sides in the same direction as P and Q and lengths in proportion.
- Graphically evaluate the resultant which is equivalent in direction and proportional in magnitude to the diagonal.
  
- **Trigonometric solution**
- Use the law of cosines and law of sines to find the resultant.

# Components of Force

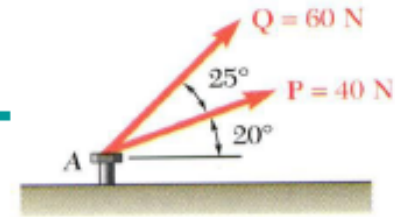


Solution:

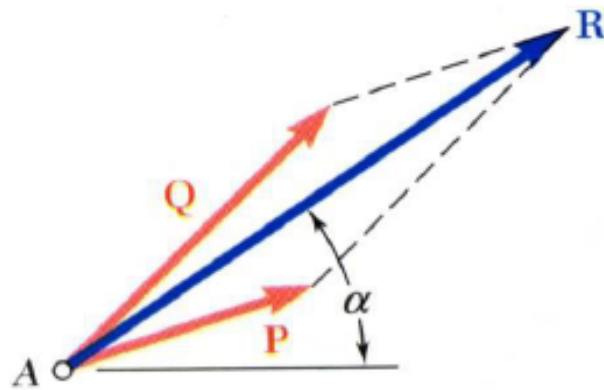

- **Graphical solution** - A parallelogram with sides equal to P and Q is drawn to scale. The magnitude and direction of the resultant or of the diagonal to the parallelogram are measured,

$$\mathbf{R} = 98 \text{ N} \quad \alpha = 35^\circ$$


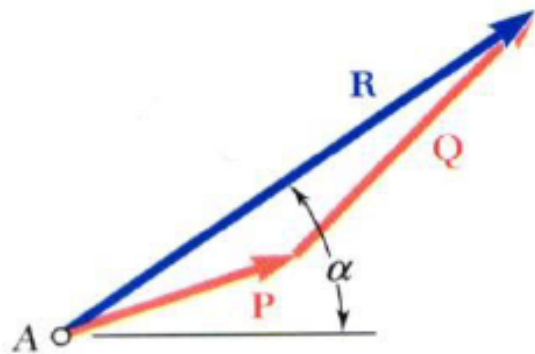


- **Graphical solution** - A triangle is drawn with P and Q head-to-tail and to scale. The magnitude and direction of the resultant or of the third side of the triangle are measured,

$$\mathbf{R} = 98 \text{ N} \quad \alpha = 35^\circ$$

# Components of Force

## Trigonometric Solution:

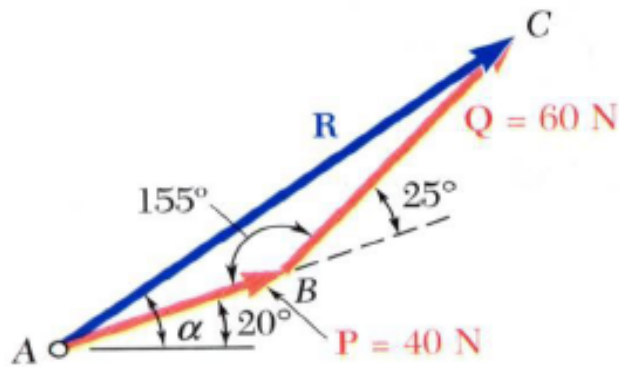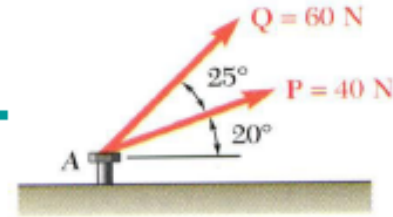

$$R^2 = P^2 + Q^2 - 2PQ \cos B$$
$$= (40\text{N})^2 + (60\text{N})^2 - 2(40\text{N})(60\text{N})\cos 155^\circ$$

$$R = 97.73\text{N}$$

$$\frac{\sin A}{Q} = \frac{\sin B}{R}$$

$$\sin A = \sin B \frac{Q}{R}$$

$$= \sin 155^\circ \frac{60\text{N}}{97.73\text{N}}$$


$$A = 15.04^\circ$$

$$\alpha = 20^\circ + A$$

$$\alpha = 35.04^\circ$$

# Components of Force

**Example 3:** Tension in cable  $BC$  is  $725\text{ N}$ ; determine the resultant of the three forces exerted at point  $B$  of beam  $AB$ .


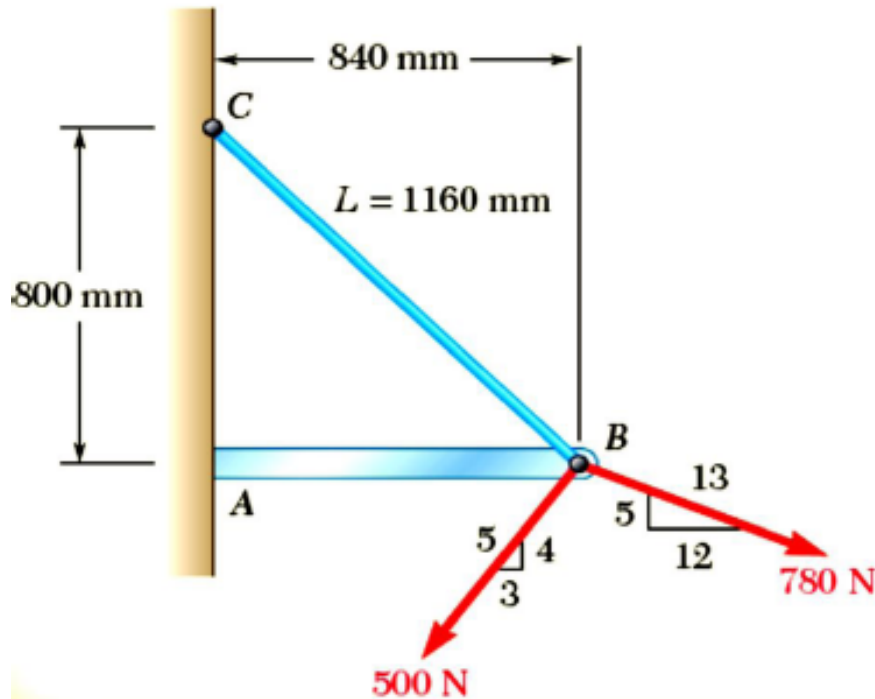


Solution:

- Resolve each force into rectangular components.
- Determine the components of the resultant by adding the corresponding force components.
- Calculate the magnitude and direction of the resultant.

# Components of Force


## Solution

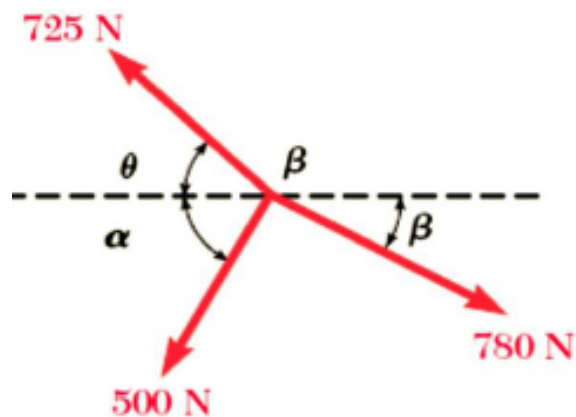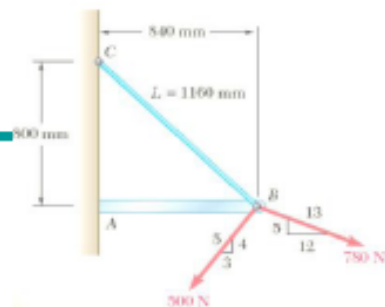

- Resolve each force into rectangular components.

Magnitude, N	x Component, N	y Component, N
725	-525	500
500	-300	-400
780	720	-300
	$R_x = -105$	$R_y = -200$

$$\mathbf{R} = R_x \mathbf{i} + R_y \mathbf{j} \quad \mathbf{R} = (-105 \text{ N})\mathbf{i} + (-200 \text{ N})\mathbf{j}$$

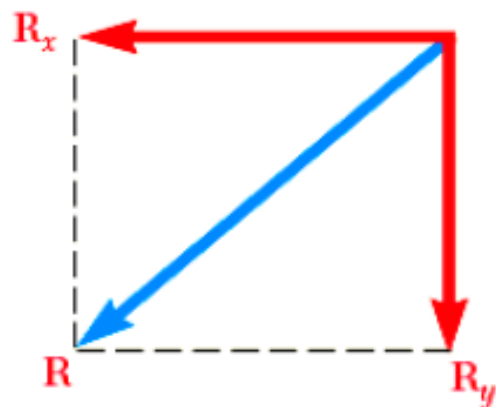


- Calculate the magnitude and direction.

$$\tan \alpha = \frac{-R_y}{-R_x} = \frac{200 \text{ N}}{105 \text{ N}} \quad \alpha = 62.3^\circ$$


$$R = \sqrt{R_x^2 + R_y^2} = 225.9 \text{ N} \quad \sphericalangle 62.3^\circ$$



# Rectangular Components in Space

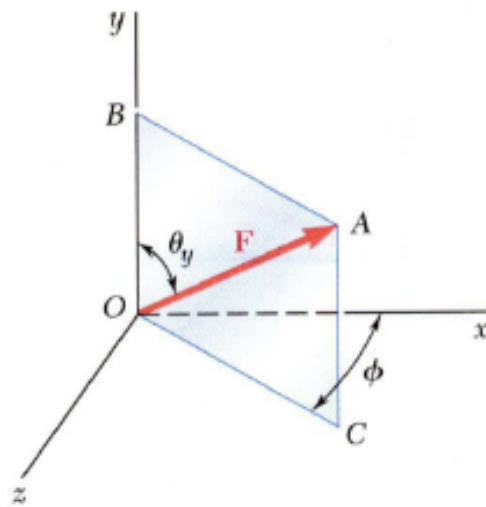


- The vector  $\vec{F}$  is contained in the plane  $OBAC$ .

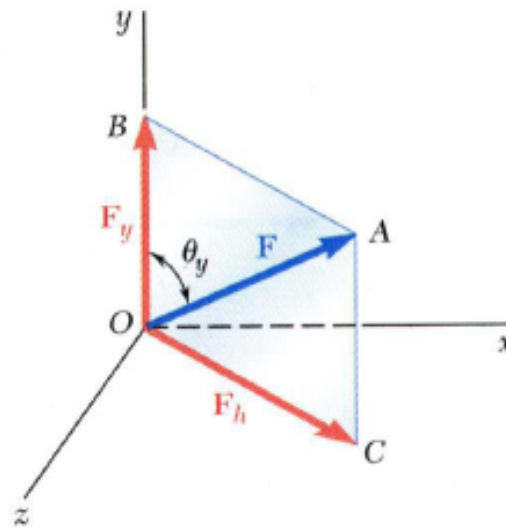

- Resolve  $\vec{F}$  into horizontal and vertical components.

$$F_y = F \cos \theta_y$$

$$F_h = F \sin \theta_y$$


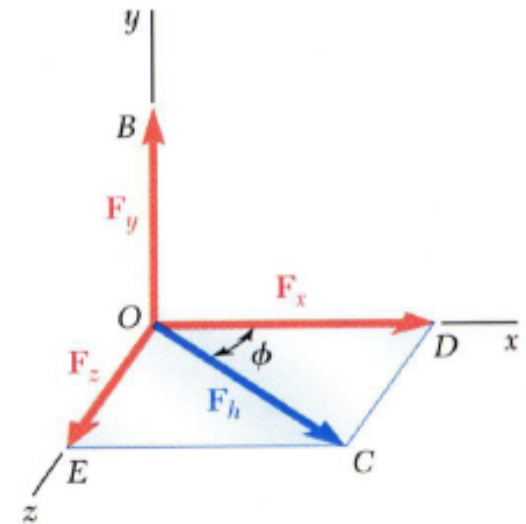


- Resolve  $F_h$  into rectangular components

$$\begin{aligned} F_x &= F_h \cos \phi \\ &= F \sin \theta_y \cos \phi \end{aligned}$$

$$\begin{aligned} F_z &= F_h \sin \phi \\ &= F \sin \theta_y \sin \phi \end{aligned}$$

# Rectangular Components in Space

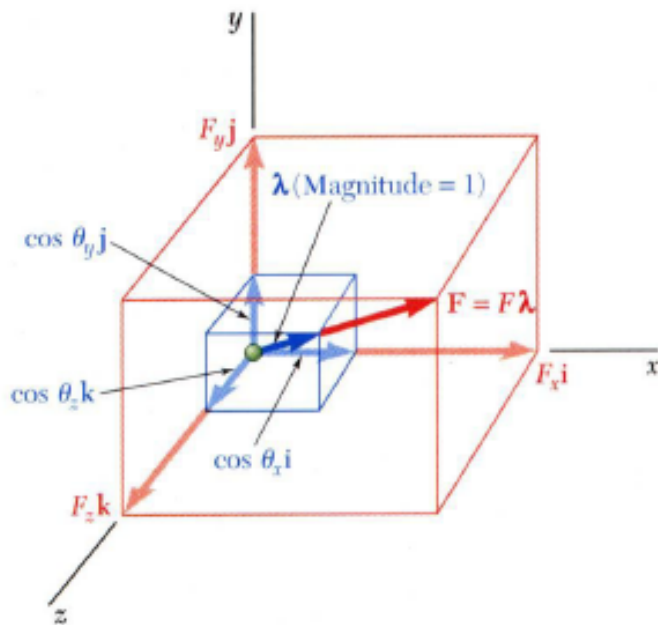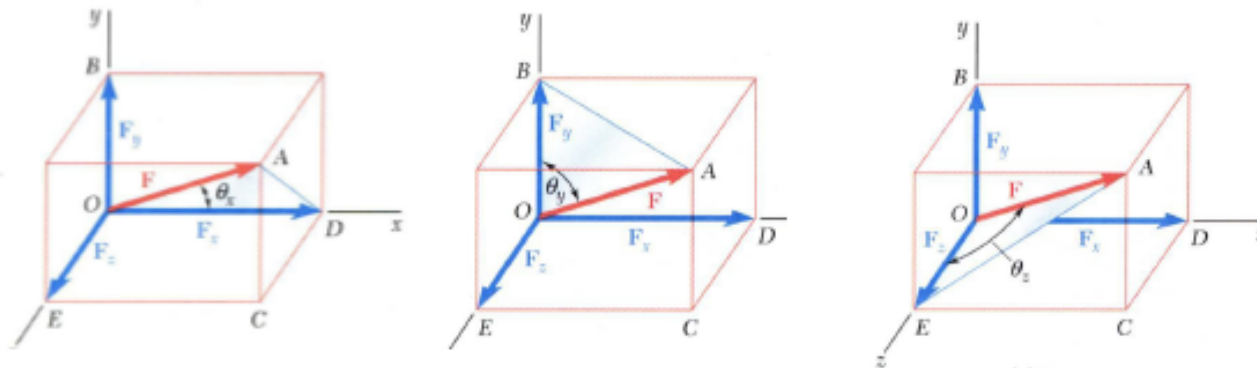

- With the angles between  $\vec{F}$  and the axes,
 
$$F_x = F \cos \theta_x \quad F_y = F \cos \theta_y \quad F_z = F \cos \theta_z$$

$$\vec{F} = F_x \vec{i} + F_y \vec{j} + F_z \vec{k}$$

$$= F(\cos \theta_x \vec{i} + \cos \theta_y \vec{j} + \cos \theta_z \vec{k})$$


$$= F \vec{\lambda}$$

$$\vec{\lambda} = \cos \theta_x \vec{i} + \cos \theta_y \vec{j} + \cos \theta_z \vec{k}$$
- $\vec{\lambda}$  is a unit vector along the line of action of  $\vec{F}$  and  $\cos \theta_x$ ,  $\cos \theta_y$ , and  $\cos \theta_z$  are the direction cosines for  $\vec{F}$

# Rectangular Components in Space

Direction of the force is defined by the location of two points:

$$M(x_1, y_1, z_1) \text{ and } N(x_2, y_2, z_2)$$

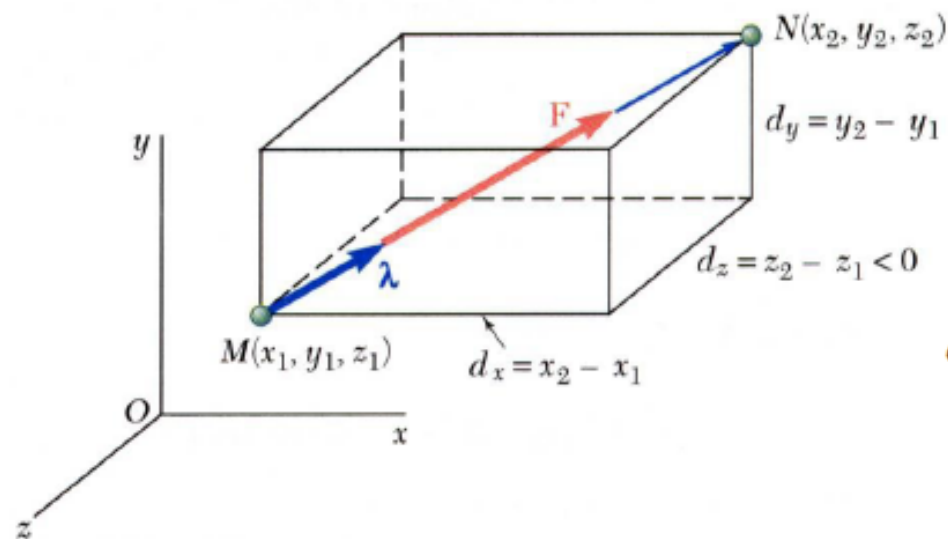

$\vec{d}$  = vector joining  $M$  and  $N$

$$= d_x \vec{i} + d_y \vec{j} + d_z \vec{k}$$

$$d_x = x_2 - x_1 \quad d_y = y_2 - y_1 \quad d_z = z_2 - z_1$$

$$\vec{F} = F \vec{\lambda}$$

$$\vec{\lambda} = \frac{1}{d} (d_x \vec{i} + d_y \vec{j} + d_z \vec{k})$$

$$F_x = \frac{F d_x}{d} \quad F_y = \frac{F d_y}{d} \quad F_z = \frac{F d_z}{d}$$