

King Saud University

College of Engineering

IE – 341: “Human Factors Engineering”

Spring – 2024 (2<sup>nd</sup> Sem. 1445H)

***Chapter 3. Information Input and Processing***

***Part 1: Information Display – Coding***

**Prepared by: Ahmed M. El-Sherbeeny, PhD**

# Chapter Overview

## Information Processing and Compatibility

1. Information Display – Coding (Ch. 3)
2. Fitts' Law (Ch. 3, Ch. 9)
3. Hick Hyman Law (Ch. 3)
4. Signal Detection Theory (Ch. 3)
5. Memory - Attention (Ch. 3)
6. Compatibility - Part 1 - Spatial Compatibility (Ch. 10)
7. Compatibility - Part 2 - Movement - Modality  
Compatibility (Ch. 10, Ch.3)



# Lesson Overview


## 1. Information Display and Coding (Chapter 3)

- Displaying Information
  - Information Presented by Displays
  - Selection of Display Modality
- Coding of Information
  - Coding
  - Characteristics of a Good Coding System
- Compatibility
  - Conceptual Compatibility
  - Movement Compatibility
  - Spatial Compatibility
  - Modality Compatibility




# DISPLAYING INFORMATION

- Human information input and processing depends on the sensory reception of relevant **external stimuli** which contain the information

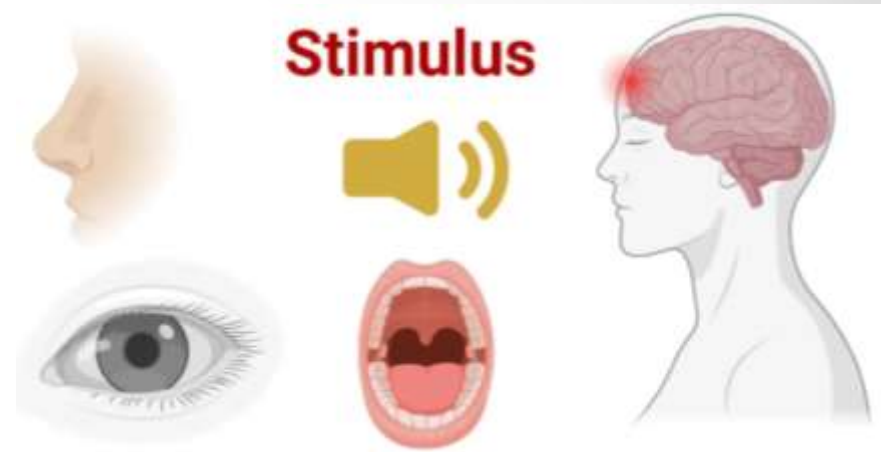

- The original source of information (the **distal stimulus**) is some object, event, or environmental condition

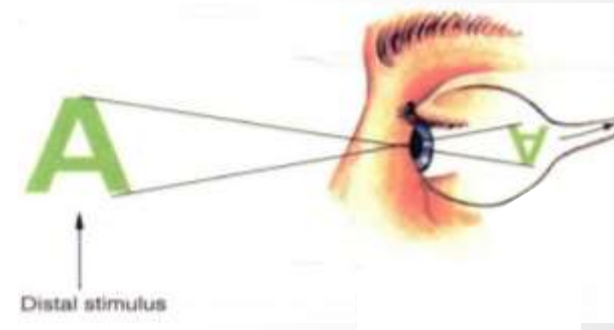

- Information from the distal stimulus may come to us:
  - **directly** (e.g. direct observation of plane), or
  - **indirectly** (e.g. radar or telescope)



## Cont. DISPLAYING INFORMATION

- In the case of **indirect sensing**, the new distal stimuli may be
  - **coded stimuli** (e.g. visual or auditory displays), or:
  - **reproduced stimuli** (e.g. TV, radio, hearing aids)
  - In both cases the coded or reproduced stimuli become the *actual* distal stimuli to the human sensory receptors



- Human factors are required when *indirect* sensing applies
- **Display** is a term that applies to any indirect method of presenting information (e.g. highway traffic sign, radio)



## INFORMATION PRESENTED BY DISPLAYS (General)

- Information presented by displays can be **dynamic** or **static**.

- **Dynamic information:**

- changes continuously or is subject to change through time
- e.g.: traffic lights, radar displays, temperature gauges



- **Static information:**

- remains fixed over time
- e.g.: alphanumeric data, traffic signs, charts, graphs, labels
- Note that static information presented through **VDT's** (video display terminals) is considered static information.



## INFORMATION PRESENTED BY DISPLAYS (Detailed)

- **Quantitative:** such as temperature or speed
- **Qualitative:** represents approximate value, trend or rate of change
- **Status:** reflects the condition of a system
  - e.g.: on or off, traffic lights
- **Warning and signal:** indicating danger or emergency



On



Off



## INFORMATION PRESENTED BY DISPLAYS (Detailed)

- **Representational:** pictorial or graphical representation of objects, areas, or other configurations

- e.g. photographs, maps, heartbeat oscilloscope



- **Identification:** used to identify a condition, situation or object

- e.g. traffic lanes, colored pipes



- **Alphanumeric\* and symbolic:**

- e.g. signs, labels, printed material, computer printouts



- **Time-phased:**

- Display of pulsed or time-phased signals
- The duration and inter-signal intervals are controlled



# SELECTION OF DISPLAY MODALITY



- Visual or auditory displays? Tactual sense?  
The selection of the **sensory modality** depends on a number of considerations
- Table 3.1 helps in making a decision regarding visual or auditory presentation of information\*

TABLE 3-1  
WHEN TO USE THE AUDITORY OR VISUAL FORM OF PRESENTATION

Use auditory presentation if:	Use visual presentation if:
1 The message is simple.	1 The message is complex.
2 The message is short.	2 The message is long.
3 The message will not be referred to later.	3 The message will be referred to later.
4 The message deals with events in time.	4 The message deals with location in space.
5 The message calls for immediate action.	5 The message does not call for immediate action.
6 The visual system of the person is overburdened.	6 The auditory system of the person is overburdened.
7 The receiving location is too bright or dark-adaptation integrity is necessary.	7 The receiving location is too noisy.
8 The person's job requires moving about continually.	8 The person's job allows him or her to remain in one position.


# CODING OF INFORMATION

- **Coding** takes place when the original stimulus information is converted to a new form and displayed symbolically
- Examples are:
  - radar screens where the aircrafts are converted and presented as dots on the screen
  - maps displaying populations of different cities with different symbols.

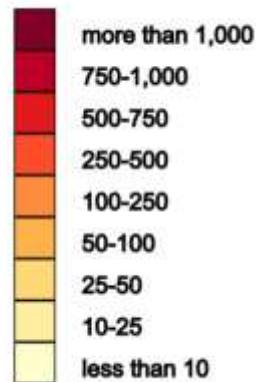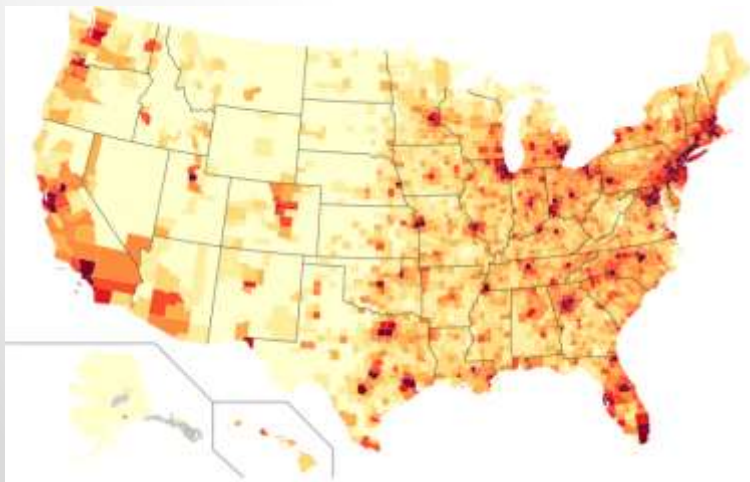

# CODING OF INFORMATION (Cont.)

- Information is coded along various dimensions
- Examples:
  - Varying the size, brightness, color and shape of targets on a computer screen
  - Varying the frequency, intensity, or on-off pattern of an audio warning signal

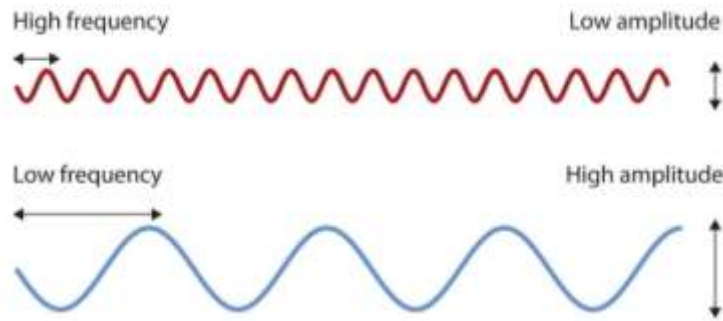

- Each of the above variations constitutes a dimension of the displayed stimulus, or a **stimulus dimension**

# CODING OF INFORMATION (Cont.)

- The usefulness of any stimulus dimension in conveying information depends on the ability of people to:
  - Identify a stimulus based on its position along the stimulus dimension (such as identifying a target as bright or dim, large or small)

- This is an example of **absolute judgment**



- Distinguish between two or more stimuli which differ along the stimulus dimension (such as indicating which of the two stimuli is brighter or larger)

- This is an example of **relative judgment**
- Note, people are generally able to make fewer discriminations on an absolute basis than on a relative basis



# CHARACTERISTICS OF A GOOD CODING SYSTEM

- **Detectability** of codes:

- stimulus must be detectable by human sensory mechanisms under expected environmental conditions
- e.g. is worker able to see the control knob in mine?



- **Discriminability** of codes:

- every code symbol must be discriminable (differentiable) from other symbols
- the number of coding levels is important



- **Meaningfulness** of codes:

- coding system should use codes meaningful to user
- Meaning could be
  - **inherent** in the code (e.g. bent arrow on traffic sign)
  - or **learned** (e.g. red color for danger)
- Meaningfulness: related to [conceptual compatibility](#)



# CHARACTERISTICS OF A GOOD CODING SYSTEM (cont.)

- **Standardisation** of codes:

- when a coding system is to be used by different people in different situations, it is important that the codes be standardised, and kept the same for different situations
- e.g. meaning of the red color in different parts of a factory



- Use of **multidimensional codes**:

- this can increase the number and discriminability of coding stimuli used
- e.g. using different size-color combinations greatly increases the number of stimuli that can be identified on an [absolute basis](#)\*



# COMPATIBILITY

- It is the relationship between the stimuli and the responses to human expectations
- A major goal in any design is to make it compatible with human expectations
- It is related to the process of **information transformation**
  - the *greater* the degree of compatibility, the *less* recording must be done to process information
  - This leads to faster learning and response time, less errors, and reduced mental workload
  - People like things that work as they expect them to work



# COMPATIBILITY (Cont.)

- Four types of compatibility:

- Conceptual
- Movement
- Spatial
- Modality



- **1. Conceptual compatibility:**

- related to degree that codes, symbols correspond to conceptual associations people have
- It relates to how meaningful codes and symbols are to people who use them
- e.g.: airplane symbol to denote an airport on a map means much more than a square or circle
- e.g.: creating meaningful abbreviations and names for computer applications







# COMPATIBILITY (Cont.)

- **2. Movement compatibility:**


- relates to the relationship between the movement of the displays and controls and the response of the system being displayed or controlled.
- e.g.: to increase the volume on the radio, we expect to turn the knob clockwise.
- e.g.: upward movement of a pointer is expected to correspond to an increase in a parameter

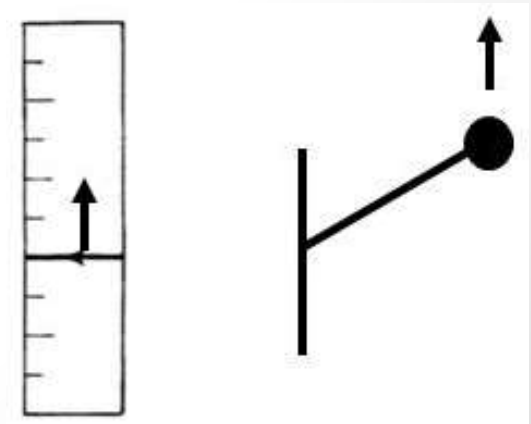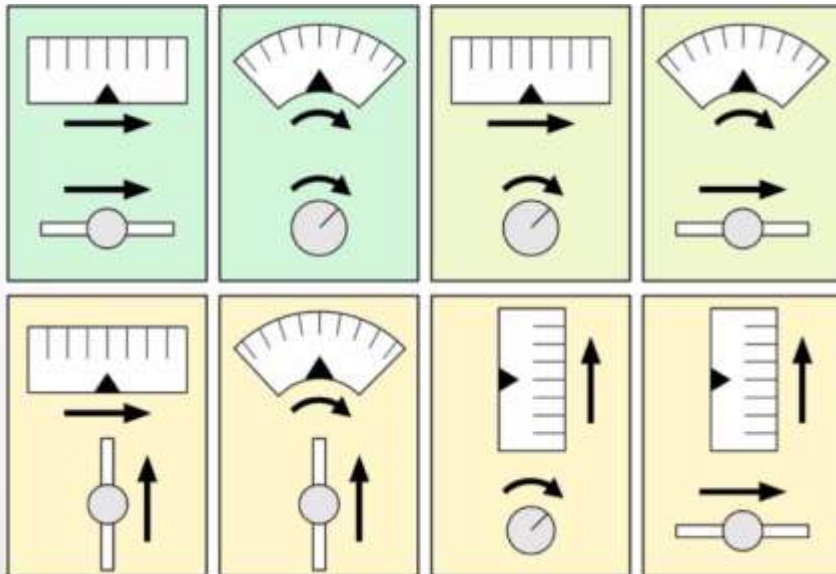

# COMPATIBILITY (Cont.)

- **3. Spatial Compatibility**


- Refers to the physical arrangement in space of controls and their associated displays
- e.g. how displays are lined-up with respect to corresponding control knobs\*

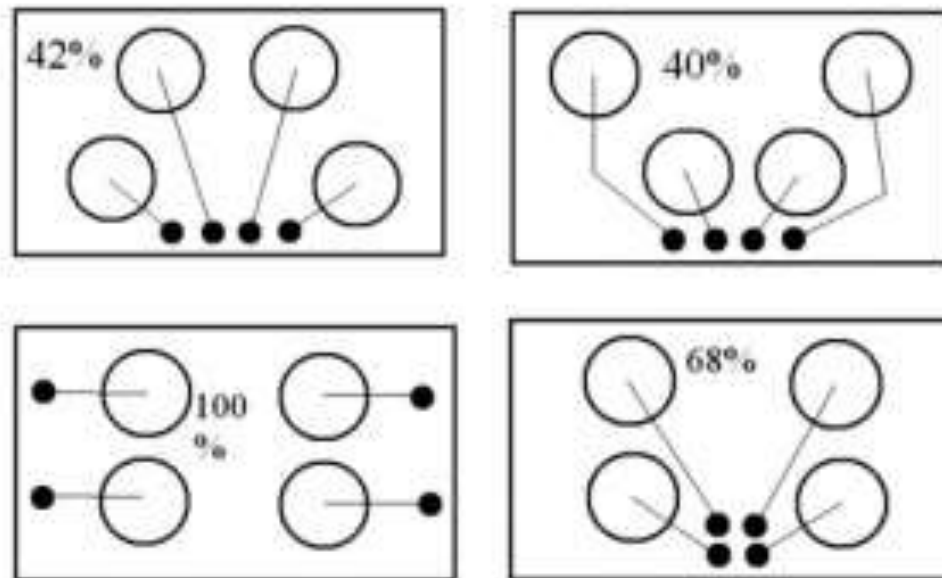

# COMPATIBILITY (Cont.)

## • 4. Modality compatibility:

- refers to the fact that certain stimuli-response modality combinations are more compatible with some tasks than with [others](#)
- this is simply related to the how our brains are “wired”
- e.g.: responding to a *verbal command* that needs *verbal action* is faster than responding to a *written or displayed command* requiring the same *verbal action*\* (another e.g. is shown below)

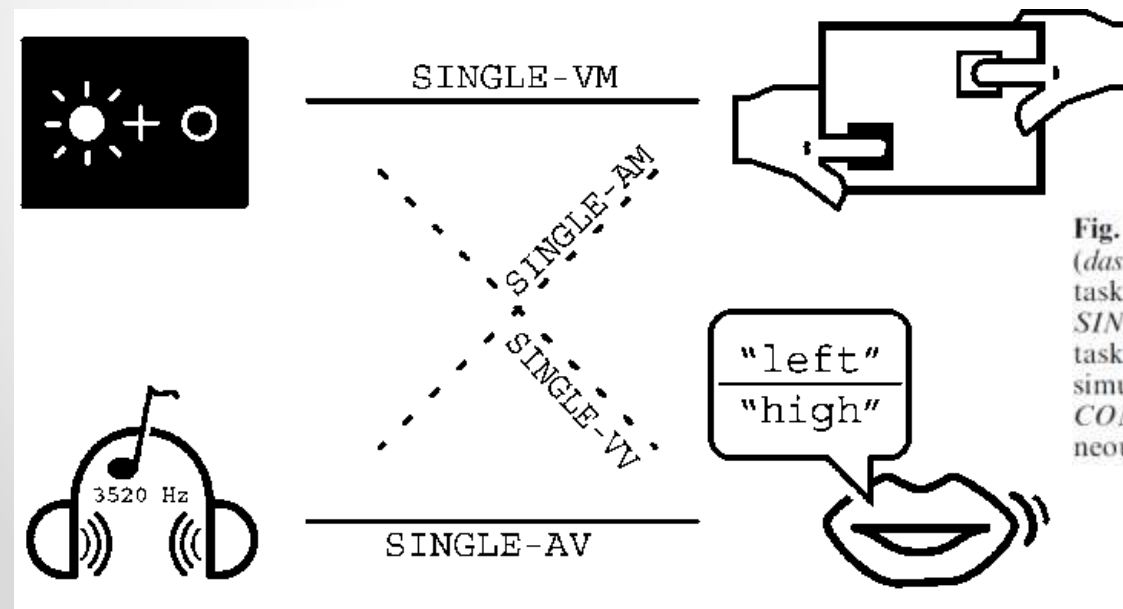

**Fig. 1** Modality compatible (*solid lines*) and modality incompatible (*dashed lines*) stimulus-response pairs. *SINGLE-VM* single task visual-manual; *SINGLE-AV* single task auditory-vocal; *SINGLE-AM* single task auditory-manual; *SINGLE-VV* single task visual-vocal. *SINGLE-VM* and *SINGLE-AV* were performed simultaneously in the modality compatible dual task (*DUAL-COMP*), *SINGLE-AM* and *SINGLE-VV* were performed simultaneously in the modality incompatible dual task (*DUAL-INCOMP*)

# References

- ***Human Factors in Engineering and Design***. Mark S. Sanders, Ernest J. McCormick. 7<sup>th</sup> Ed. McGraw: New York, 1993. ISBN: 0-07-112826-3.
- ***The neural effect of stimulus-response modality compatibility on dual-task performance: an fMRI study***. C Stelzel, et al, Psychological Research, 2006.