

Chapter 26  
Capacitance and Dielectric



© 2004 Thomson - Brooks/Cole

## 26.1 Definition of capacitance

PhET Capacitor Lab: Visualize Charging, Voltage, Capacitance, and Electric Fields

[https://phet.colorado.edu/sims/html/capacitor-lab-basics/latest/capacitor-lab-basics\\_en.html](https://phet.colorado.edu/sims/html/capacitor-lab-basics/latest/capacitor-lab-basics_en.html)

In the front figure, you can see two conductors. Such system is called a capacitor. Due to the different charge at the two plates, difference in potential  $\Delta V$  exists between the two plates. It has been found that,


$$q \propto \Delta V$$

So,  $q = C \Delta V$  26.1

Where  $C$  is the capacitance. The capacitance is defined as the ratio between the charge and the difference potential.

$$C = \frac{q}{\Delta V}$$

The unit of the capacitance is Farad (F). In practical, the devices have capacitance ranging from microfarad ( $\mu\text{F}=10^{-6}$  F) to picofarad ( $\text{pF}=10^{-12}$  F).

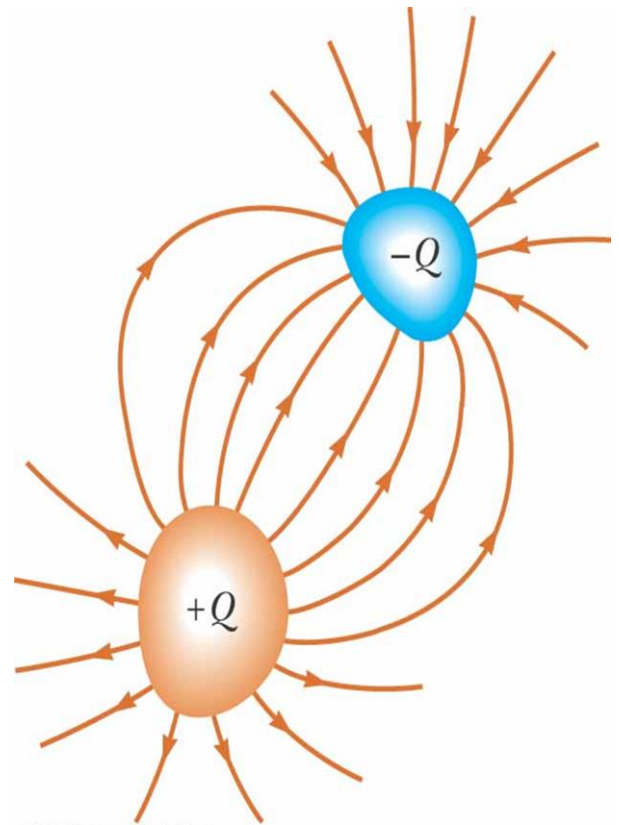

## How a capacitor charges when connected to a battery.

### Step 1: Connecting the Capacitor to a Battery

- A capacitor consists of **two conductive plates** separated by an **insulating material** (dielectric).
- When the capacitor is **connected to a battery**, one plate is linked to the **positive terminal**, and the other plate is linked to the **negative terminal** through conducting wires.

### Step 2: Battery Creates an Electric Field

- The battery maintains a **potential difference (voltage, V)** between its terminals.
- This creates an **electric field** inside the wires, pushing **free electrons** to move.

### Step 3: Electron Movement from the Negative Terminal

- Electrons from the **negative terminal** of the battery move through the wire **toward one plate** of the capacitor.
- As electrons accumulate, this plate **gains a negative charge**.

### Step 4: Electron Removal from the Positive Plate

- At the same time, the **battery pulls electrons** away from the **other plate**, leaving it with a **positive charge**.
- The removal of electrons is driven by the attraction of positive ions inside the battery.


### Step 5: Charge Accumulation and Electric Field Formation

- As the capacitor charges, the **potential difference** between its plates **increases**, opposing further electron flow.
- Inside the capacitor, an **electric field** forms **between the plates**, storing **electrostatic energy** in the dielectric material.

### Step 6: Charging Stops When Equilibrium is Reached

- The capacitor continues charging until its voltage **matches the battery's voltage**.
- At this point, **no more current flows**, and the capacitor is **fully charged**.
- The charge stored is given by  $Q=CV$ , where:
  - $Q$  is the charge,
  - $C$  is the capacitance,
  - $V$  is the battery voltage.

When the capacitor is connected to the terminals of a battery, electrons transfer between the plates and the wires so that the plates become charged.



## Comments:

- **A capacitor does not "store" electrons**, but rather **separates charge** across its plates.
- **Electrons flow through the wires but do not pass between the plates** due to the dielectric.
- **Energy is stored in the electric field** between the plates, which can later be discharged to power a circuit.

## 26.2 Calculating Capacitance

### ❖ Parallel-plate capacitors:

In the figure, two parallel plates carry different type and equal charges ( $\pm Q$ ) and separated distance  $d$ . As we discussed in chapter 24, the surface charge  $\sigma$  is  $\frac{q}{A}$ .

Then, the electric field between the two plates is given by:

$$E = \frac{\sigma}{\epsilon_0} = \frac{q}{\epsilon_0 A} \quad 26.2$$

Also, the electric potential can be written as,

$$V = \int_0^d E \, dx = E \, d \quad 26.3$$

Comparing Eq. (26.2) and (26.3), we can derive an expression for the capacitance of the parallel-plate as follows,

$$V = \frac{q}{\epsilon_0 A} d = \frac{d}{\epsilon_0 A} q \quad 26.4$$
$$q = \frac{\epsilon_0 A}{d} V$$

$$\implies \rightarrow \quad C = \frac{\epsilon_0 A}{d} \quad 26.5$$

Then, the capacitance of the parallel plate depends on:

- 1- The distance between the two plates,
- 2- The area of each plate, and
- 3- The material between the two plates.

## Examples:

### Example-1

A parallel-plate capacitor with air between the plates has an area  $A = 2.00 \times 10^{-4} \text{ m}^2$  and a plate separation  $d = 1.00 \text{ mm}$ . Find its capacitance.

### Example-2


An air-filled capacitor consists of two parallel plates, each with an area of  $7.60 \text{ cm}^2$ , separated by a distance of  $1.80 \text{ mm}$ . A  $20.0 \text{ V}$  potential difference is applied to these plates. Calculate (a) the electric field between the plates, (b) the surface charge density, (c) the capacitance, and (d) the charge on each plate.

### Example-3:

When a potential difference of  $150 \text{ V}$  is applied to the plates of a parallel-plate capacitor, the plates carry a surface charge density of  $30.0 \text{ C/m}^2$ . What is the spacing between the plates?

### Example-4:

What is the capacitance of the capacitor shown below, knowing that the plates are square in shape?

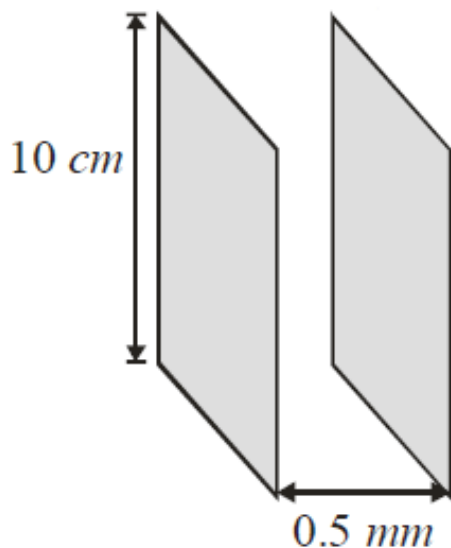

Think about it: What is the difference between a battery and a capacitor?

# CAPACITOR VS. BATTERY



## CAPACITOR

- The potential energy is stored in the electric field



## BATTERY

- The potential energy is stored in the form of chemical energy which is later converted to electric energy

Think about it !!

## How Can Capacitors Significantly Reduce Costs and Improve Train Efficiency?



Think about it: Why are multiple capacitors used in electric circuits?

